

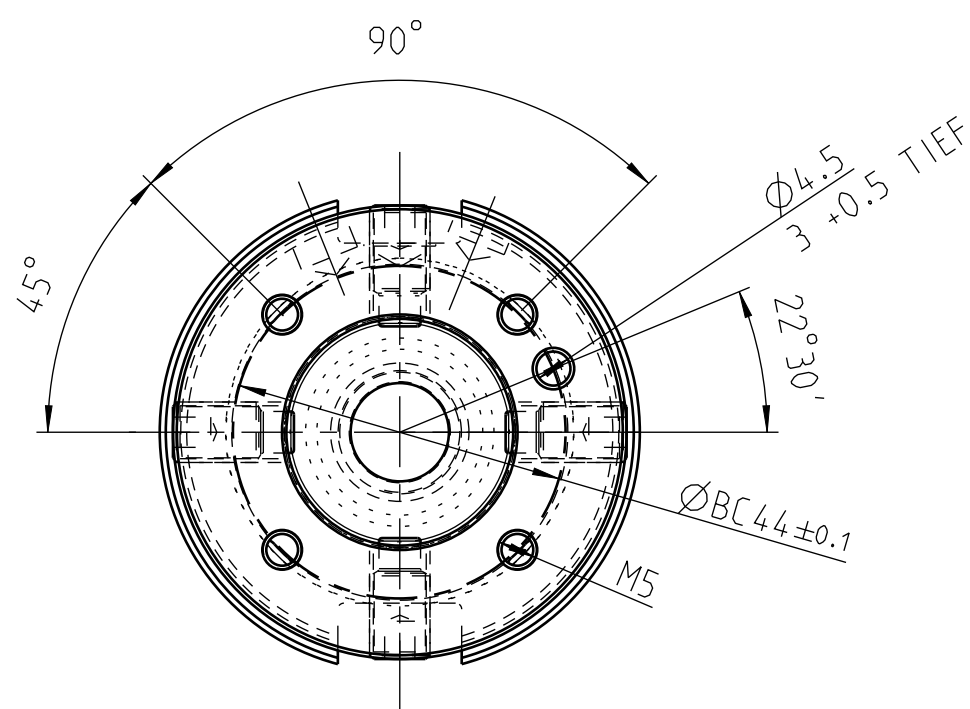




SIZE 40
ASME B5.50
(PER MN633 BL. 1)

MODULE 60
PER MN5000-14

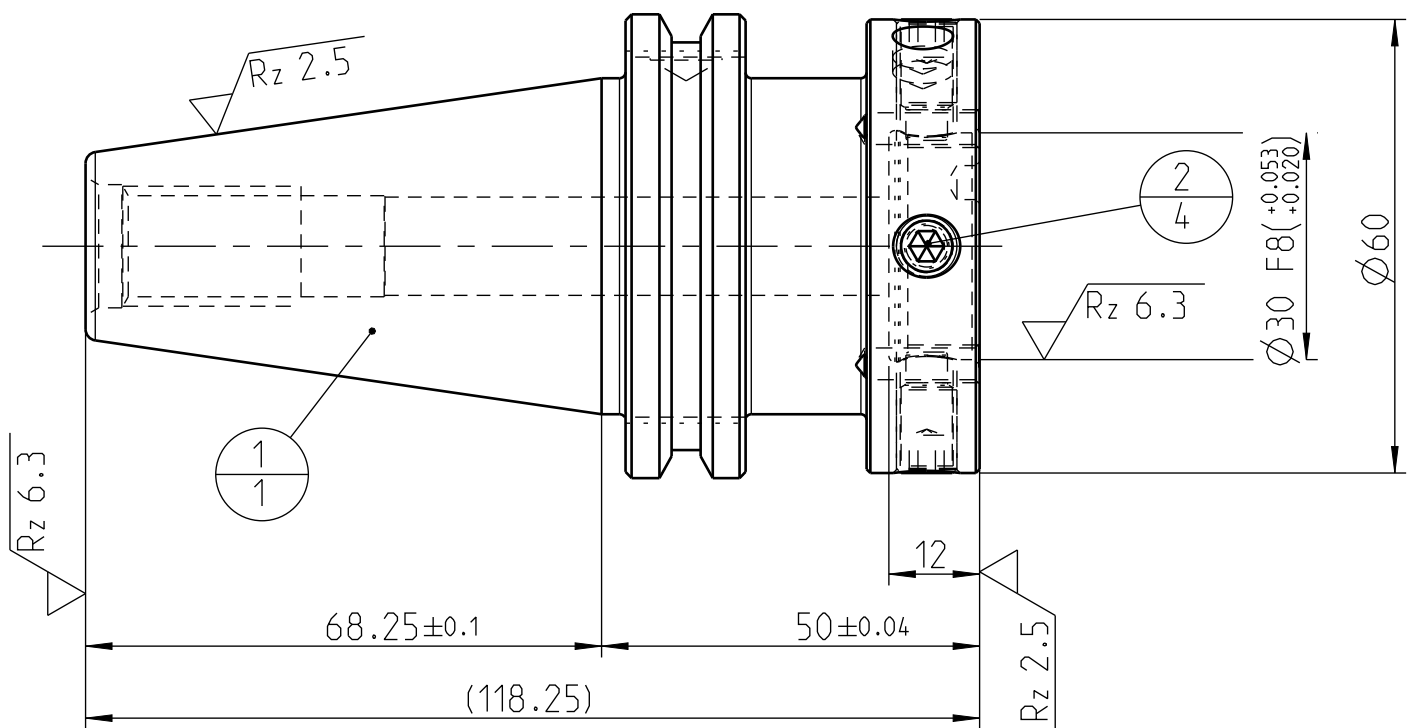

CASE HARDENED HRC 60 ±2
DEPTH OF CASEHARDENING 0.8
THREAD SOFT

MACH.-NO.:	STATION:	SPINDLE:
PART-NAME:		
PART-NO.:		
MATERIAL:		
TOOL-NO.:	OP-NO.:	HOLE-NO.:

3	1		COPY GEOMETRY - DELETE IN BOM!		
2	4	10075355	THREADED PIN	S.ISO 4028-M8X1X16-45H-KLF	
1	1		BODY		
PART	TYP	QUAN.	UT	MATERIAL NUMBER	DESCRIPTION
					TECHNICAL SPECIFICATION
					CUSTOMER NUMBER
					DATE
					NAME
					DRAWN
					CHK.
					APP.
					SCALE: 1:1
					A2
					ORIGIN
					AA1
					INDEX
					REPLACES DWG. NO.:MN1023-15
					REPLACED BY DWG. NO.:
					SHEET 1 OF 1 SHEETS

BALANCE GRADE DIN ISO 1940-G 6.3
(COMPLETE ASSEMBLY)
AT 3000 MIN⁻¹

ADDITIONALLY TO VA-NO. 07.05.01 MARK WITH:

THIS DRAWING REMAINS OUR EXCLUSIVE PROPERTY. IT IS ENTRUSTED ONLY FOR THE PURPOSE AGREED UPON AND MAY NOT BE USED FOR ANY OTHER PURPOSE. COPIES OR OTHER REPRODUCTIONS MAY ONLY BE MADE FOR THE PURPOSE AGREED UPON. NEITHER ORIGINALS NOR REPRODUCTIONS MAY BE TRANSMITTED OR OTHERWISE MADE ACCESSIBLE TO A THIRD PARTY WITHOUT OUR WRITTEN CONSENT.

DIMENSIONAL TOLERANCES PER ISO 2768-F UNLESS OTHERWISE SPECIFIED

DIMENSIONS NOT SHOWN ARE MAPAL STANDARDS

REGISTERED WITH GERMAN AND FOREIGN PATENT OFFICES

MAPAL
Präzisionswerkzeuge
Dr. Kress KG

REPLACES DWG. NO.:MN1023-15

REPLACED BY DWG. NO.:

DATE

NAME

DRAWN

CHK.

APP.

SCALE: 1:1

A2

ORIGIN

AA1

INDEX

TECHNICAL SPECIFICATION:

OS-AD-CAT040-MOD060-050-11

REPLACES DWG. NO.:MN1023-15

TECHNICAL SPECIFICATION:

OS-AD-CAT040-MOD060-050-11

REPLACES DWG. NO.:MN1023-15

MATERIAL NUMBER:

30320126

REPLACES DWG. NO.:

30320126

REPLACES DWG. NO.:

30320126

DRAWING NO.:

299218-001-00-ED1

REPLACES DWG. NO.:

299218-001-00-ED1

REPLACES DWG. NO.:

299218-001-00-ED1